



# E-SOL-24VAC Solenoid Valve



Electronic & Electrical  
Solutions

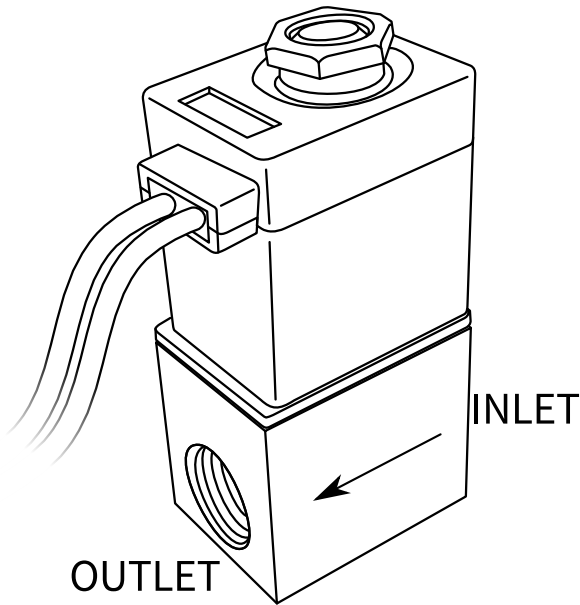

## Features

- ⦿ 24VAC coil
- ⦿ Normally closed
- ⦿ Brass body
- ⦿ 1/4" connection
- ⦿ 6.5W
- ⦿ IP65 protection
- ⦿ Direct acting

## Specifications

Compatible fluids	Air, water, oil
Orifice size	2.5mm
CV value	0.23
Fluid connection	1/4" BSP
Maximum viscosity	20 CST
Working pressure range	0 - 800kPa
Maximum pressure	1100kPa
Temperature range	-10 to 80 degrees C
Voltage ranges	24VAC 50Hz +/- 10%, 12VDC +/- 10%
Insulation	F class
Body material	Brass
Seal material	NBR
Terminations	4.5mm male quick connect on 120mm leads



Electronic & Electrical  
Solutions

3/9 Rawlins Circuit, Kunda Park  
QLD | 4556 | Australia

Ph: +61 (07) 5453 4355

e: [contact@eesolutions.net.au](mailto:contact@eesolutions.net.au)

[www.eesolutions.net.au](http://www.eesolutions.net.au)