

PREMIUM VORTEX SUMP PUMP

RVS200 / 300 / 340

The REEFE® Vortex Pump is specifically designed for the most demanding jobs with industrial grade motor insulation (Class 'F') and cast iron impellers. Every pump is factory tested for quality assurance and is ultra-reliable. High quality guaranteed.




Features & Benefits

- Low Power Consumption 250 / 550 watts
- Thermal Overload Protection
- Solids handling 25mm (200), 30mm (300), 35mm (340)
- High Performance 200 L/min, 300 L/min & 340 L/min
- 10m power cable H05RN-F (H07RN-F on RVS340)
- Includes hosesail
- The RVS 200 has attractive retail packaging

Construction

- Stainless Steel Motor Housing & Shaft
- Cast Iron Vortex Impeller
- Dual mechanical seal in oil chamber
- Motor insulation Class 'F'
- Cast iron base and outlet
- Depth adjustable MAC 3 float switch
- Extremely reliable construction

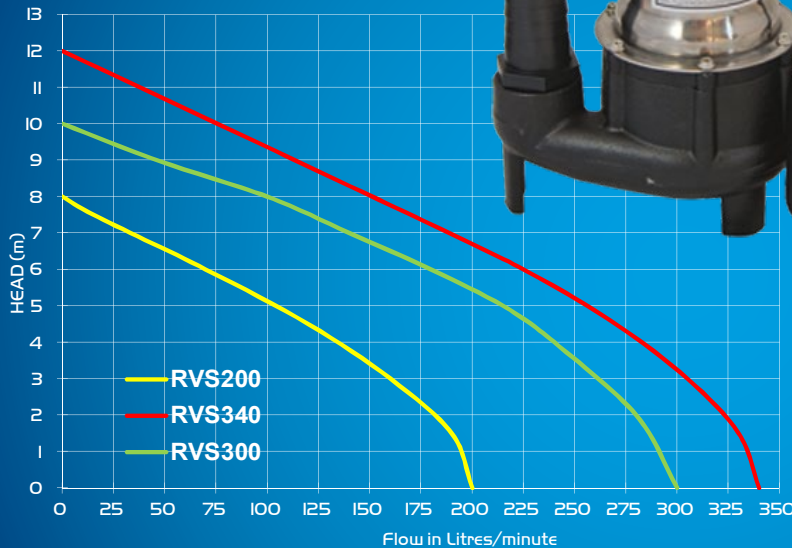

CODE	MODEL	POWER		RATED		MAXIMUM		SOLIDS HANDLING (mm)	CABLE LENGTH (m)	OUTLET		WEIGHT (KG)	SIZE (L x W x H (mm))
		AMPS	WATTS	FLOW (L/min)	HEAD (m)	FLOW (L/min)	HEAD (m)			mm	inch		
8218	RVS200	2.0	250	130	4.0	200	8	25	10	40	1 1/2	9	190 x 130 x 320
8232	RVS300	4.0	400	220	5.0	300	10	30	10	50	2	13	220 x 150 x 360
8249	RVS340	5.0	550	225	6.0	340	12	35	10	50	2	14	240 x 150 x 360

